

Shan Feng Co. Ltd



Contact us

Km 49, Lagos/Ibadan Exp. way, Keita village after Redeemed Camp, Ogun State
WEB: www.shanfengcoltd.ng EMAIL: info@shanfengcoltd.ng



SHAN FENG COMPANY LTD.

WE'VE GOT ALL TIRE NEEDS COVERED



WHAT WE OFFER

TRAINING: WE EMPOWER CUSTOMERS TO MINIMIZE COST AND MAXIMIZE TIRE LIFESPAN BY PROVIDING TRAINING ON PROPER INSTALLATION & MAINTENANCE TECHNIQUES.

TIRE REPAIR: OUR EXPERT TECHNICIANS PROVIDE EFFICIENT AND RELIABLE TIRE REPAIR SERVICES TO GET YOU BACK ON THE ROAD QUICKLY AND SAFELY

PREMIUM TIRE SALES: WE OFFER A WIDE SELECTION OF TOP-QUALITY TIRES FROM VARIOUS TRUSTED BRANDS TO ENSURE OPTIMAL PERFORMANCE AND SAFETY FOR YOUR VEHICLES.

RIMS, TUBES & LINERS: WE STOCK A COMPREHENSIVE RANGE OF RIMS, TUBES AND LINERS TO COMPLEMENT OUR TIRE OFFERINGS AND PROVIDE COMPLETE TIRE SOLUTIONS

ADDRESS

KM49, LAGOS/IBADAN EXP. WAY, KEITA VILLAGE
AFTER REDEEM CAMP, OGUN STATE.

EMAIL

INFO@SHANFENGCOLTD.NG

OFFICE TEL

09161350728, 08105360972

WEBSITE

WWW.SHANFENGCOLTD.NG

Company Profile

At Shanfeng Company Limited, we're driven by a commitment to keeping businesses moving smoothly and safely. Established in 2023, we began by offering tire repair services, gaining valuable hands-on experience in understanding the specific challenges faced by drivers on Nigerian roads. This practical foundation led us to expand our offerings to include the sale of premium tires from various trusted brands, along with rims, tubes, and linens. We're not just about selling products; we're about providing comprehensive solutions. That's why we also offer training on tire installation and maintenance, empowering our customers to maximize the lifespan of their tires and minimize costs. Our goal is to be a trusted partner for transportation businesses, providing not only quality products but also the knowledge and support they need to succeed on the road..

Our Mission

To provide high-quality tire products, expert services, and empowering training that optimizes transportation efficiency, enhances safety, and minimizes costs for businesses, starting in Nigeria and expanding across the African continent and beyond.

Our Vission

To be the leading provider of comprehensive tire solutions across Nigeria and beyond, empowering businesses to achieve seamless and safe transportation

23.5-25 REPAIR PROCESS

CONDITIONS OF TIRE THAT CAN BE REPAIRED



DURING REPAIR (REPAIR PROCESS)



AFTER REPAIR



REPAIR PROCESS

CONDITIONS OF TIRE THAT CAN BE REPAIRED



DURING REPAIR (REPAIR PROCESS)




AFTER REPAIR



SEMES-SA118N

Features & Benefits

- Special formula of good wear-resistance and heat-dissipating capability
- Circumferential bending pattern produce low rolling resistance and oil-saving performance
- Strong cap and carcass design prevents blowouts
- Large and deep grooves on the shoulders prevent slip and increase the driveability

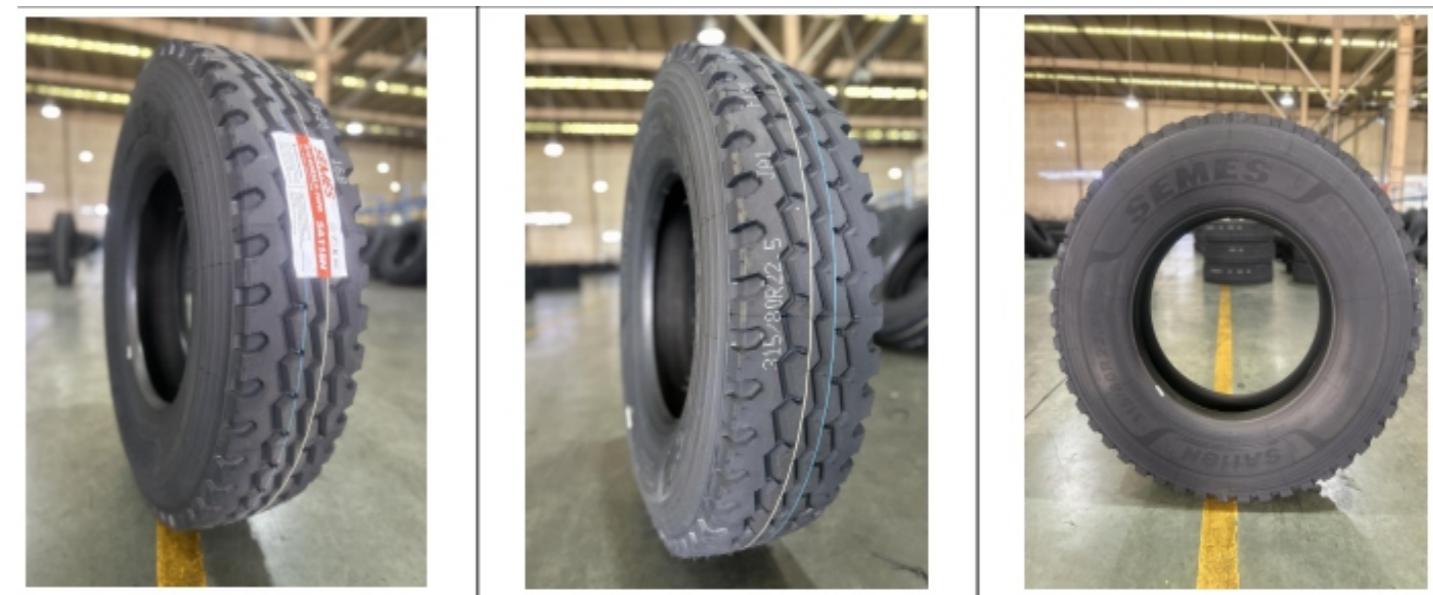

TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	157/154	G	4125	3750	15.5	235	9.0	54

SEMES-SA117N

Features & Benefits

- New pattern design, Design to prevent small stones from entering the trench.
- The carcass is strengthened.
- Upgrade the heat-resistant formula, which is more suitable for road conditions in Africa.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	157/154	G	4125	3750	15.5	235	9.0	54

TUBES & LINERS

Features & Benefits

- Tubes: Provide a reliable airtight seal, maintaining optimal tire pressure for performance and safety.
- Liners: Offer an extra layer of protection against punctures and reduce friction, extending tire life.
- Both protecting the tire casing and inner tube contributes to longer tire life, saving money on replacements.
- By minimizing flats, tubes and liners help keep vehicles on the road, reducing costly downtime and delays.



315 RIM

Features & Benefits

- 7mm X 16mm
- 8mm X 18mm
- The thickness of 16mm steel ring weighs 44-45kg.
- The weight of 18mm thick steel ring is 49kg.
- Made of high quality steel to improve the stability and durability of the steel ring



SEMES-SD875N

Features & Benefits

- Strong grip design Consider both driving force and good drainage.
- The pattern deepens by 19.5 mm and is more wear-resistant.
- Upgrade the heat-resistant formula, which is more suitable for road conditions in Africa.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	157/154	G	4125	3750	19.5	240	9.0	59.5

SEMES-SD876N

Features & Benefits

- Design of Mahjong Blocks Consider both driving force and good drainage
- The pattern deepens by 19.5 mm and is more wear-resistant.
- Upgrade the heat-resistant formula, which is more suitable for road conditions in Africa.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	157/154	G	4125	3750	19.5	240	9.0	59.5

12.00 RIM

Features & Benefits

- 18mm thickness
- The weight of the steel ring is 54.5-55kg
- Made of high quality steel to improve the stability and durability of the steel ring.



SKYBASE-SK06

Features & Benefits

- Special formula of bead generates low heat.
- Designed for heavy road and mining area.
- Strengthen steel cord on carcass and bead assures heavy duty work.
- Tough blocks provide excellent grip and braking anti-slip performance.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
12.00 R20	20	156/153	G	4000	3650	24	250	8.5	91

SEMES-SA928

Features & Benefits

- Special formula of good wear-resistance and heat-dissipating capability
- Circumferential bending pattern produce low rolling resistance and oil-saving performance
- Strong cap and carcass design prevents blowouts
- Large and deep grooves on the shoulders prevent slip and increase the driveability



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	158/156	G	4250	4000	17	240	9.0	59

SEMES-SA928H

Features & Benefits

- Special formula of good wear-resistance and heat-dissipating capability
- Circumferential bending pattern produce low rolling resistance and oil-saving performance
- Strong cap and carcass design prevents blowouts
- Large and deep grooves on the shoulders prevent slip and increase the driveability



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	22	158/156	G	4250	4000	16	250	9.0	63

TIANXIN-TD823

Features & Benefits

- The tread offers better traction.
- The base rubber is thickened for durability.
- The design is suitable for gravel roads, with improved driving force and heat dissipation.
- It features a design that prevents stones from getting stuck in the treads.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACIT (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
12.00R20	22	158/156	G	4250	4000	18	240	8.5	85.5

TORNADO-GL209A

Features & Benefits

- Designed with a one way pattern.
- The thread and edge groove design makes the tire dissipate heat quickly and the driving force is strong.
- The widened tire travel surface design makes the grip stronger, and the wider tire travel surface design makes the grip stronger.
- It is designed with a light weight structure.



TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACIT (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	20	156/150	L	4000	3350	15	240	9.0	57

SEMES-SD718

Features & Benefits

- Designed for heavy road and mining area.
- Strengthened steel cord on carcass and bead assures heavy duty work.
- Special formula of bead generates low heat.
- Tough blocks provide excellent grip and braking anti-slip performance.




TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
315/80R22.5	22	164/160	D	5000	4500	22	250	9.0	69

SEMES-SD388K

Features & Benefits

- Intensified tread compound prevents bottom crack.
- New type of belt design increases durability.
- Tough blocks provide excellent grip and traction.
- Deep grooves and wide tread design ensure high mileage and long life.
- Special pattern design prevents stone drilling.

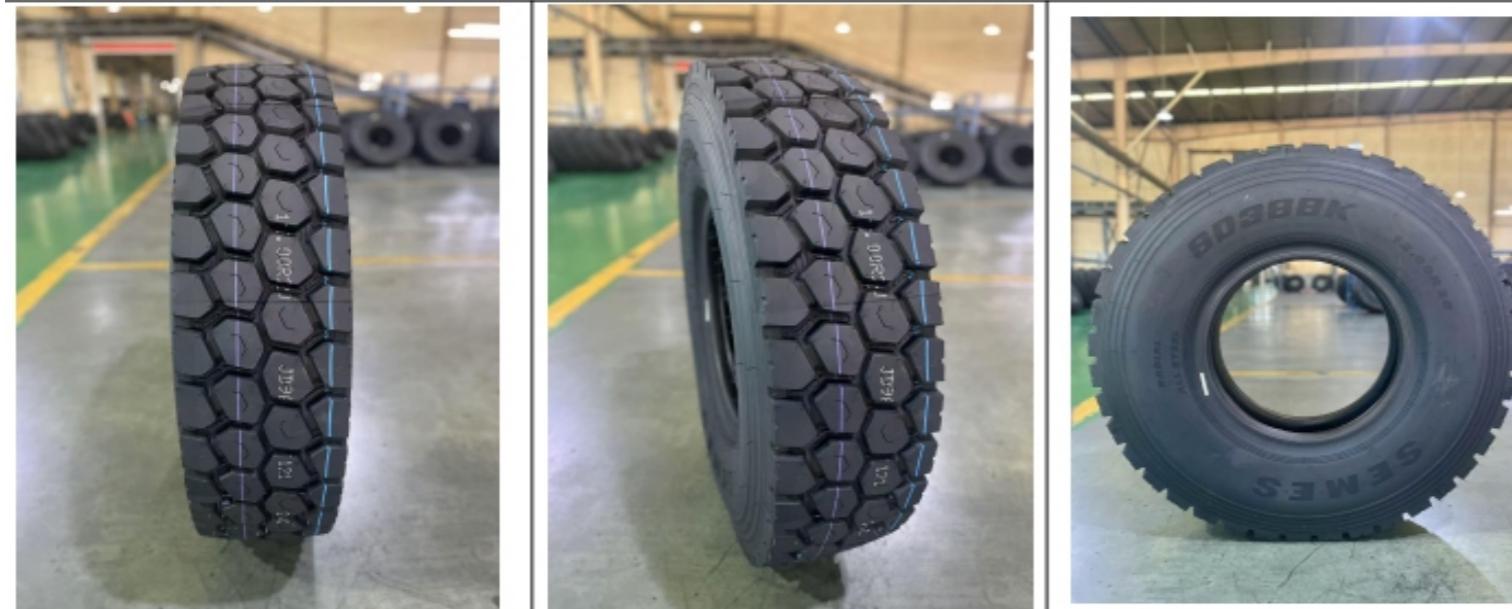


TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
12.00R20	22	156/153	J	4000	3350	22.5	251	8.5	93

SEMES-SD328K

Features & Benefits

- Special pattern design prevents stone drilling.
- Tough blocks provide excellent grip and traction.
- Deep grooves and wide tread design ensure high mileage and long life.
- Intensified tread compound prevents bottom crack.

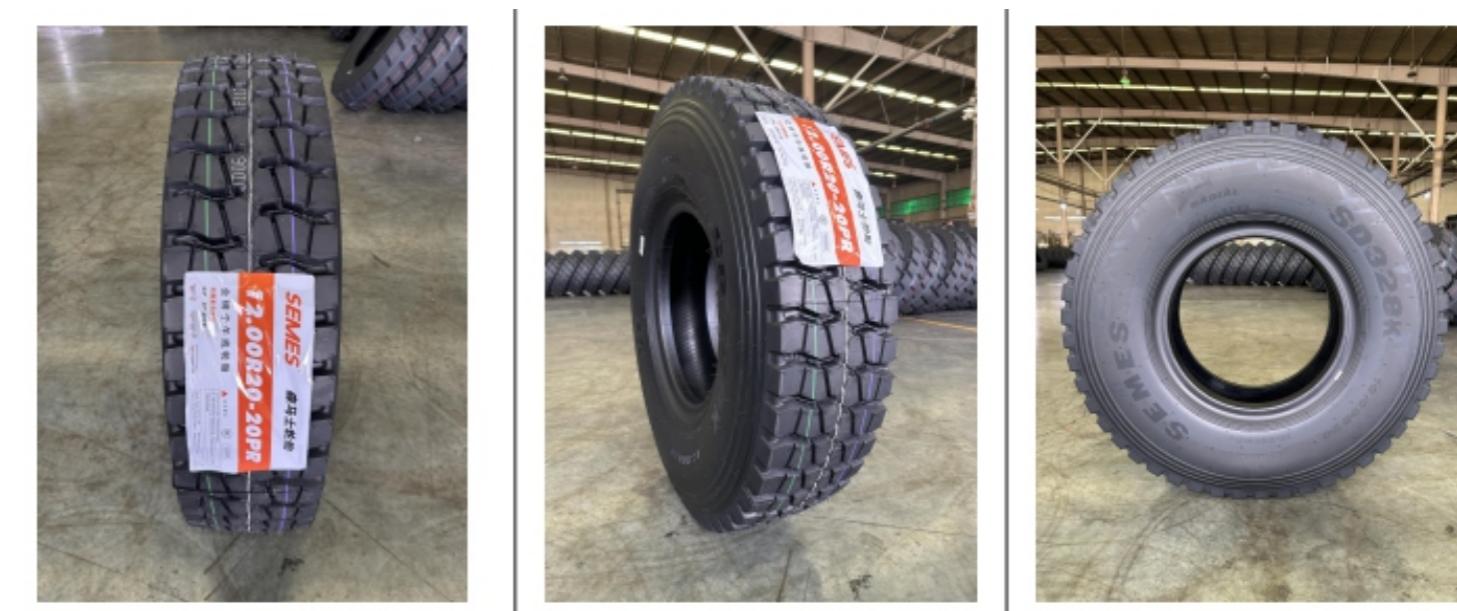

TYRE SIZE	PLY RATING	LOAD INDEX	SPEED SYMBOL	LOAD CAPACITY (KGS)		TREAD DEPTH (MM)	TREAD WIDTH	STANDARD RIM	WEIGHT (KG)
				SINGLE	DUAL				
12.00R20	22	156/153	J	4000	3500	18	250	8.5	88